


Fiber Optic Patch Cords SC-SC - SM - DUPLEX

MODEL :IK-FPC-SC-SC-SM-DX-X

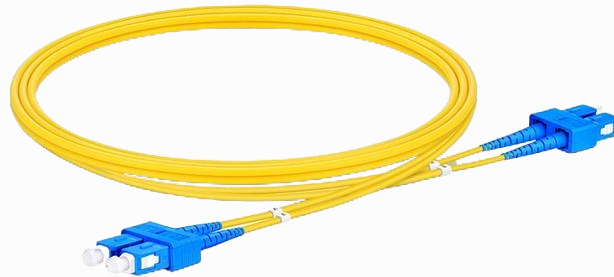

Features

- Compliant with: ANSI, Bellcore, TIA/EIA, IEC Standards
- Low Insertion Loss and High Return Loss
- Excellent Repeatability and Changeability
- Simplex and Duplex Available
- With Ceramic Ferrules
- PVC & LSZH Cable Option
- Optical Performance 100% Factory Tested

Applications

- Telecommunication Networks
- CATV Networks
- Active Device Termination
- Local Area Networks
- Data Processing Networking

Fiber Optic Patch Cords SC-SC - SM - DUPLEX

MODEL: IK-FPC-SC-SC-SM-DX-X



Specification

Characteristics	Conditions	Values
Insertion Loss	Against Reference Connector	<0.2dB
Return Loss(MM)	PC	>35dB
	UPC	>50dB
Durability	1000times	<0.1dB
Impact	1.5mm drop, 8 times	<0.2dB
Operating temperature	-40°C+80°C	
Cable outer diameter	3.0mm	

Ordering Information

MODEL : IK-FPC-SC-SC-SM-DX-X

- FPC: Fiber Optic Patch Cord
- SC-SC: Connector Type
- SM: Singlemode 9/125um
- DX: Duplex
- X: 1, 5, 10 meter length