


Cat 6A Keystone jack, RJ-45, 8 conductors, Tool-Free, UTP

MODEL: 1A68TP0A0

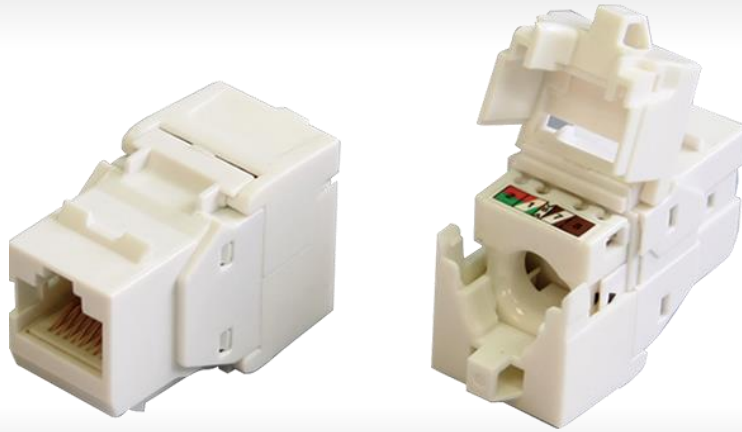

Features

- Tool-free, no additional tool required for termination
- Contacts are phosphor bronze plated with 50 micro inches hard gold
- Dual T568A & T568B wiring
- Complies with FCC Part 68
- Polycarbonate 94V0 rated
- Complies with IEEE802.3at PoE+

General

- Insulation Resistance: $\geq 500 \text{ M}\Omega$
- Withstand Volt: 1000VDC
- Contact Resistance $\leq 20 \text{ m}\Omega$
- Current Rating: 1.5A at 68°F
- Plug insertion Life: ≥ 750 times plug in
- Contact Force 99.2g (3.5oz) FCC Plug
- Plug Retention Force: 30lb (133n/13.3Kg)
- Temperature Test: -40 to 150°F (-40 to 66°C)

Cat 6A Keystone jack, RJ-45, 8 conductors, Tool-Free, UTP

MODEL: 1A68TP0A0

Material

- Polycarbonate
- 94V0 Gold plating
50u" over contact area

Technical Drawing

