


Fiber Optic Pigtails - LC - MM - OM3 - 2m

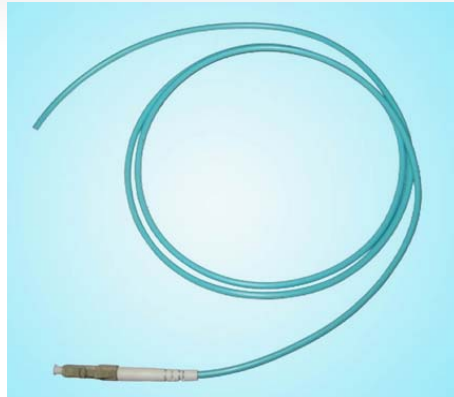

Features

- Compliant with: ANSI, Bellcore, TIA/EIA, IEC Standards
- Low Insertion Loss and High Return Loss
- Excellent Repeatability and Changeability
- Simplex and Duplex Available
- With Ceramic Ferrules
- Optical performance 100% factory tested

Applications

- Telecommunication Networks
- CATV Networks
- Active Device Termination
- Local Area Networks

Fiber Optic Pigtails - LC - MM - OM3 - 2m

Specification

Characteristics	Conditions	Values
▶ Insertion Loss Return	Against Reference Connector	<0.2dB
▶ Return Loss(MM)	PC	>45dB
	UPC	>55dB
	APC	>65dB
▶ Durability	1000times	<0.2dB
▶ Impact	1.5mm drop, 8 times	<0.2dB
▶ Operating temperature	-20 °C + 70 °C	
▶ Cable outer diameter	900um, 1.6mm, 2.0mm, 3.0mm	