


## Fiber Optic Pigtails - SC - SM - 1m - Simplex

MODEL : FOP-SC-SM-SX-1

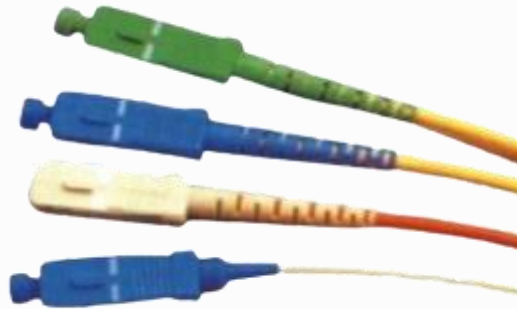

### Features

- Compliant with: ANSI, Bellcore, TIA/EIA, IEC Standards
- Low Insertion Loss and High Return Loss
- Excellent Repeatability and Changeability
- Simplex and Duplex Available
- With Ceramic Ferrules
- Optical performance 100% factory tested

### Applications

- Telecommunication Networks
- Active Device Termination
- CATV (Cable Television) Network
- Local Area Networks

## Fiber Optic Pigtails - SC - SM - 1m - Simplex

MODEL : FOP-SC-SM-SX-1

### Specifications

| Characteristics       | Conditions                  | Values |
|-----------------------|-----------------------------|--------|
| Insertion Loss        | Against Reference Connector | <0.2dB |
| Return Loss           | PC                          | >45dB  |
|                       | UPC                         | >55dB  |
| Durability            | 1000times                   | <0.2dB |
| Impact                | 1.5mm drop, 8 times         | <0.2dB |
| Operating temperature | -20°C+70°C                  |        |
| Cable outer diameter  | 900um, 1.6mm, 2.0mm, 3.0mm  |        |

### Ordering Information

MODEL : FOP-SC-SM-SX-1

- FOP : Fiber Optic Pigtails
- SC : Connector Type
- SM : Single Mode
- SX : Simplex
- 1m : Meter Length