

Pro'sKit®

Professional Tool Solutions Since 1991



FB-1688



FB-1688C
(with scrap collector)

FIBER CLEAVER

24 cutting points, blade lifetime up to 2,000 cleaves/ each point

4 in 1 Fiber holder ,available with a single fiber adapter, patch cord and drop cables

Pro'sKit®

Professional tool solution since 1991

Prokit's Industries Co., Ltd., based in Taiwan, manufactures professional tools since 1991, supplying 4,000 products in 22 categories of hand tools, power tools, soldering equipment and test instruments used in different fields of electronic, computer, networking & telecom industries and education as well.



QUALITY ASSURANCE



AFTER-SALES SERVICE

PRODUCT INTRO

HIGH PRECISION CLEAVEING

Durabal Aluminium Alloy Steel Structure



Clamp Cover

Clamp

Fiber Holder Clamp

Cutting Blade

Scrap
Collector

Blade Rail

Non-slip Pad


4 in 1 Fiber Holder

The blade is to
your side before
setting a fiber.

NOTICE: FB-1688 does not include scrap collector

4 IN 1 HOLDER - MULTI-APPLICATION

Design for single fiber cleaving

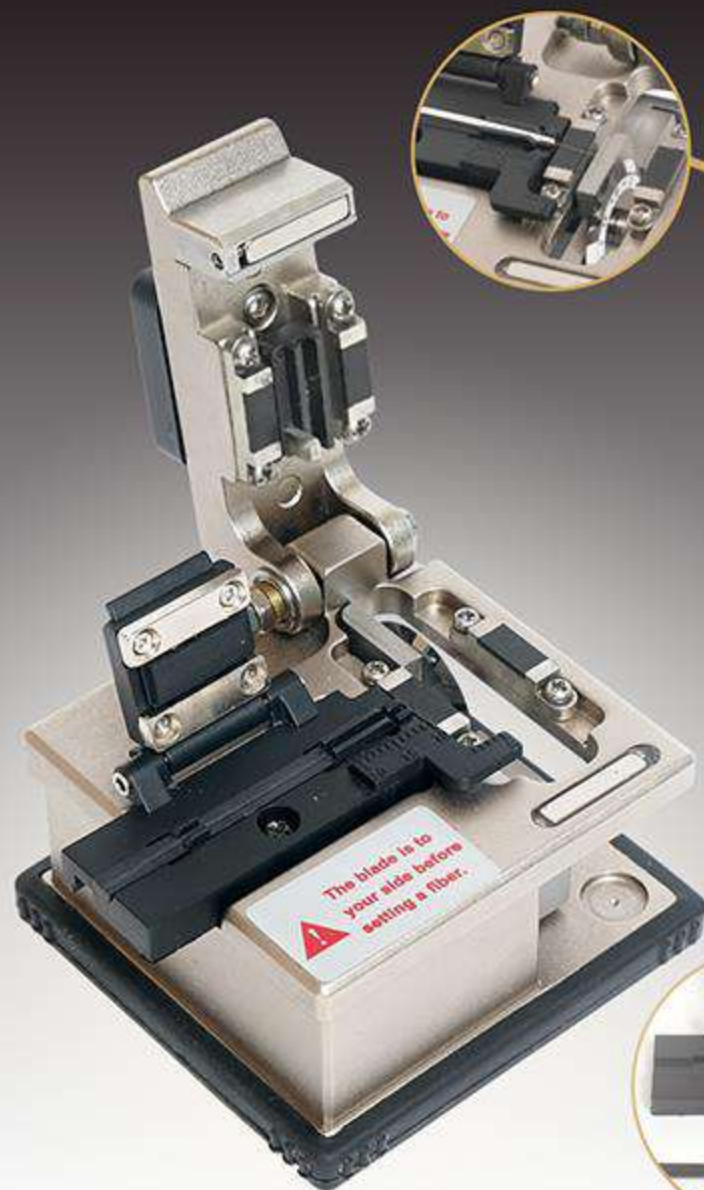

For $\varnothing 125\mu\text{m}$ Single Fiber
 $\varnothing 250\mu\text{m}$ (0.2mm) Bare Fiber
 $\varnothing 900\mu\text{m}$ (0.9mm) Bare Fiber



For Patch Cord

Please take out the rail and store in the bottom of the fiber holder while cleaving patch cord



FOR 3x2mm Drop Cable

Please take out the rail and store in the bottom of the fiber holder while cleaving drop cable

4 in 1 Holder

FB-1688

FIBER CLEAVER

High precision cleaves 250 to 900 micron coated single fibers, patch cord and drop cables



FB-1688C

FIBER CLEAVER w/ SCRAP COLLECTOR

High precision cleaves 250 to 900 micron coated single fibers, patch cord and drop cables


SCRAP COLLECTOR

Detachable design,
provides user
convenience



ALUMINUM ALLOY STEEL STRUCTURE

Durable and Lightweight

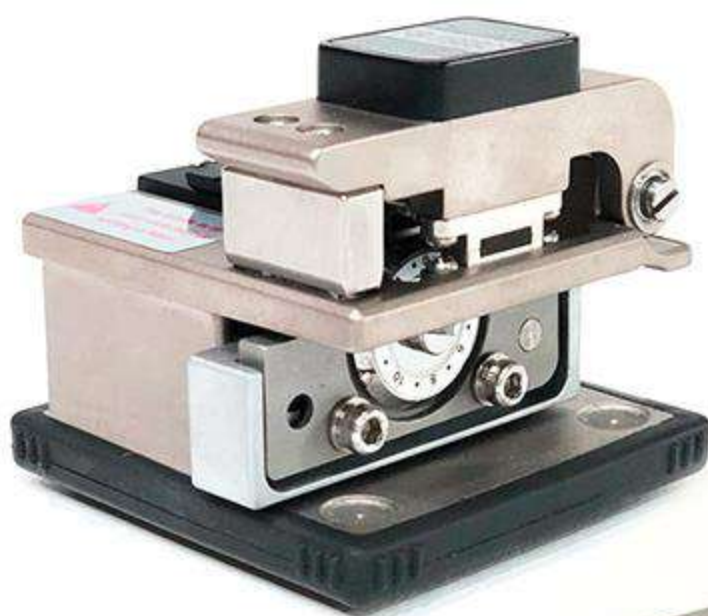

NON-SLIP PAD

Secures Safe Operation




TUNGSTEN BLADE

24 Cutting Points offers
2,000 Cleaves/each

WIDE APPLICATION

Ideal for Fusion Splicing and Preparing Fiber for Good End Face to Make Great FTTX work

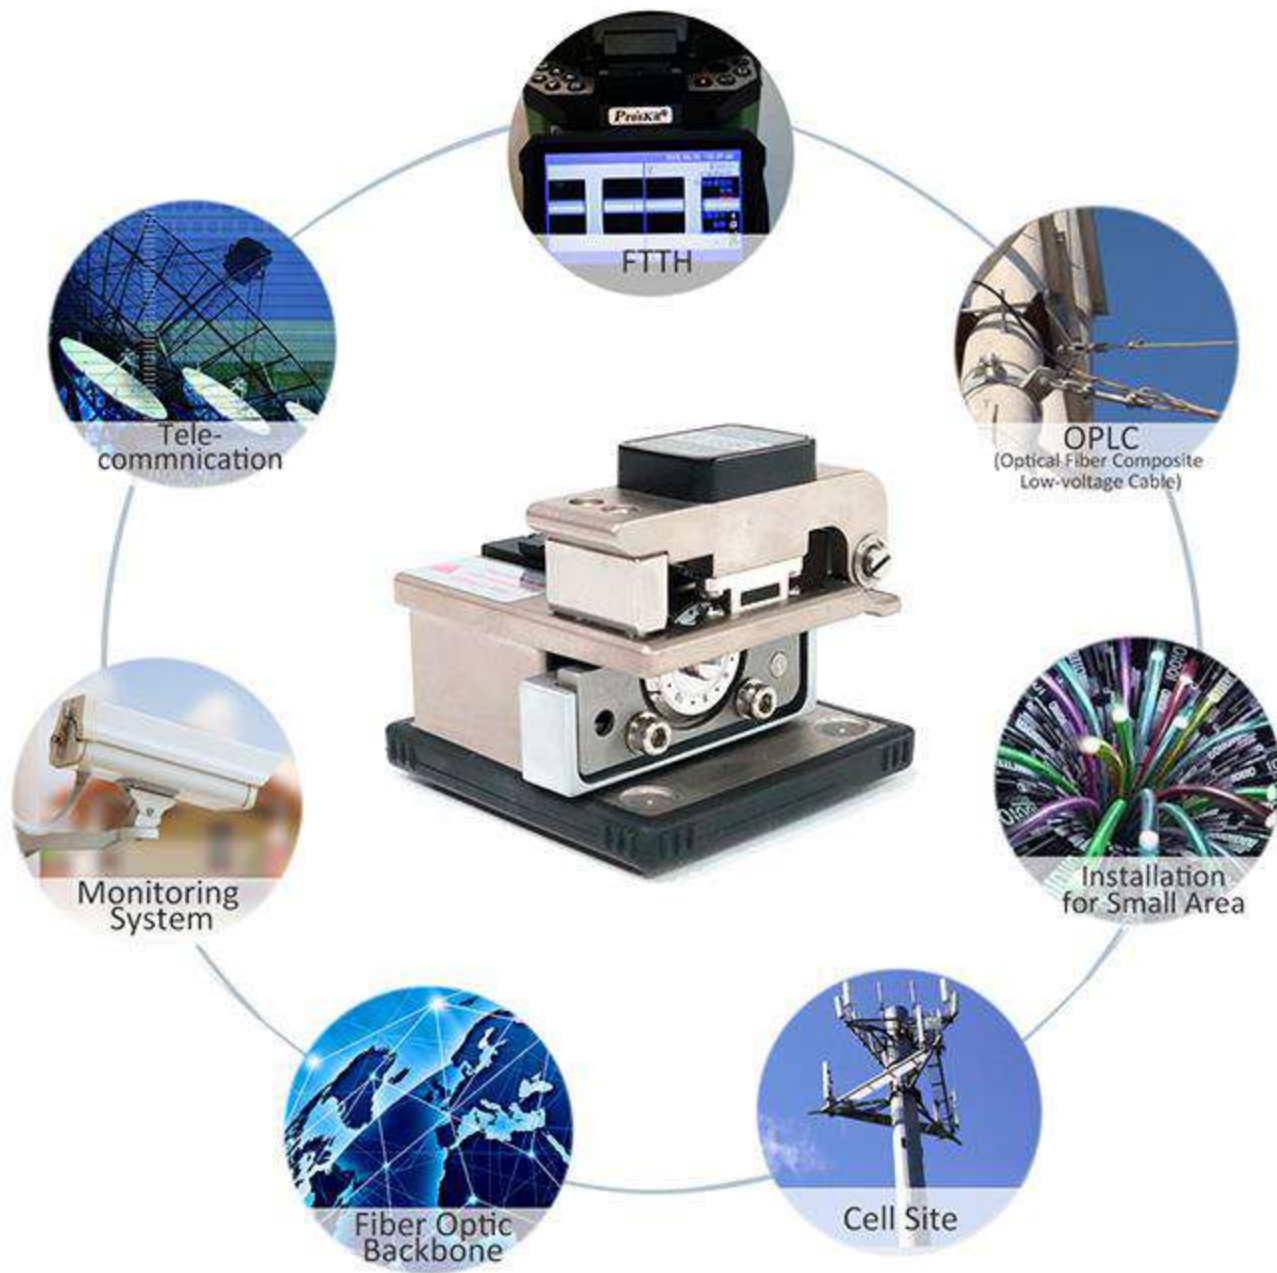

FB-1688 SERIES FIBER CLEAVER

■ **FB-1688**
FIBER CLEAVER

■ **FB-1688C**
FIBER CLEAVER
W/ SCRAP COLLECTOR



Application	ø125 μm Single fiber
	ø250μm(0.2mm) Bare fiber
	ø900μm(0.9mm) Bare fiber
	Patch cord
	3X2mm Drop cable
Cleave length	5-20mm
Cleave angle	< 0.8°
Dimension	62 x 60 x 56mm
Cleaver	24 Cutting points
blade	Model No.:5FB-1688-BLADE

FB-1688

Pro'sKit®

Professional Tool Solutions Since 1997

FIBER CLEAVER

High precision cleaves

Blade lifetime up to
48000 cleaves

24 cutting points

PROFESSIONAL



FB-1688

FIBER CLEAVER

Specifications

- Cladding Diameter: 125 μ m
- Fiber Core/Cladding Diameter:
Single fiber 250 μ m-1000 μ m, patch cord 8
FT/TH and cable
- Cleave length: 5-10 mm
- Dimensions: 120x50x40 mm

Model

FB-1688

Fiber cleaver

FB-1688C

Fiber cleaver
with auto-coarse

Description

