

Specification

Part Number

IFIA-130-2004

Input

Nominal Voltage	230V
Frequency	50/60Hz
Phase	Single phase
Plug type	IEC60309 (32A 250VAC 2P+E) Legrand
Power Cord Spec	3 x 6.0mm ² x 3 meters
Max input current	32A
Rated input current	32A
Wiring Style	L-N wiring
Power Capacity	7360W

Output

Nominal Voltage	230V
Max output current	32A
Output Connections	20 x IEC 320 C13; 4 x IEC 320 C19
Outlet Locking	Yes

Protections

Circuit Overload Protection	2 x 16A circuit breaker; single pole
-----------------------------	--------------------------------------

Metering

Input/Phase/Circuit Metering	Yes
Breaker Status Monitoring	Yes
Metering Accuracy	+/- 1%
Environmental Monitoring	Temperature ,Humidity
Monitoring Parameters	Voltage (V), Current (A), Active Power (kW), Apparent Power (kVA), Energy (kWh), Power Factor, , Frequency(Hz)

Communication

Access	SNMP (V1,V2c,V3) , Http/Https, Telnet, Modbus-RTU
Alerts	Voltage, Current, (Temperature, Humidity optional)
Service	TFTP, SMTP
Daisy-chain	1Master 4 Slaves

Physical

Product Dimensions (HxWxD)	1489.5 1461.5 x 56 x 44.4 mm
Box Dimensions (HxWxD)	1650x192x88mm(Inner box), 1670x405x290mm (Package Size)
Product Weight	4.5 KG
Box Weight	5 KG
Mounting Style	2 ends brackets
Mounting Distance	1449.5 1421.5mm


Environmental

Operating Temperature	-10~45℃
Operating Relative Humidity	5%~95%
Operating Elevation	0~3000 meters

Compliance

EMC Verification	EN55022, EN61000
Safety Verification	IEC/EN 60950, IEC/EN 62368
Environmental Verification	RoHS 2.0

Drawing

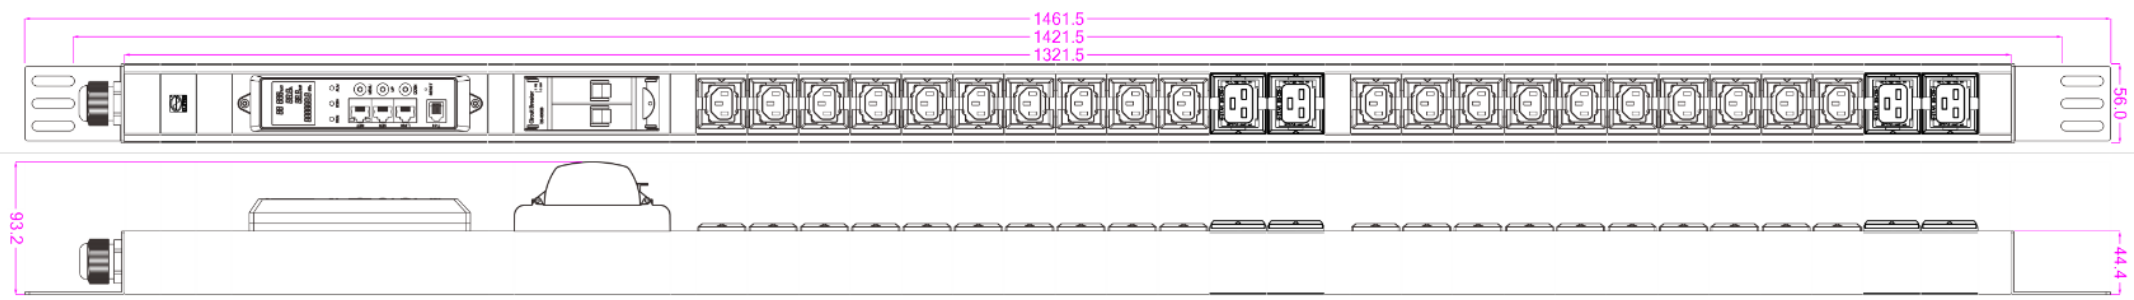

Change C19 socket to new anti-fall:

