


Fan-out Optical Fiber Cable

MODEL : IK-FOC-GJFJBVY-XX

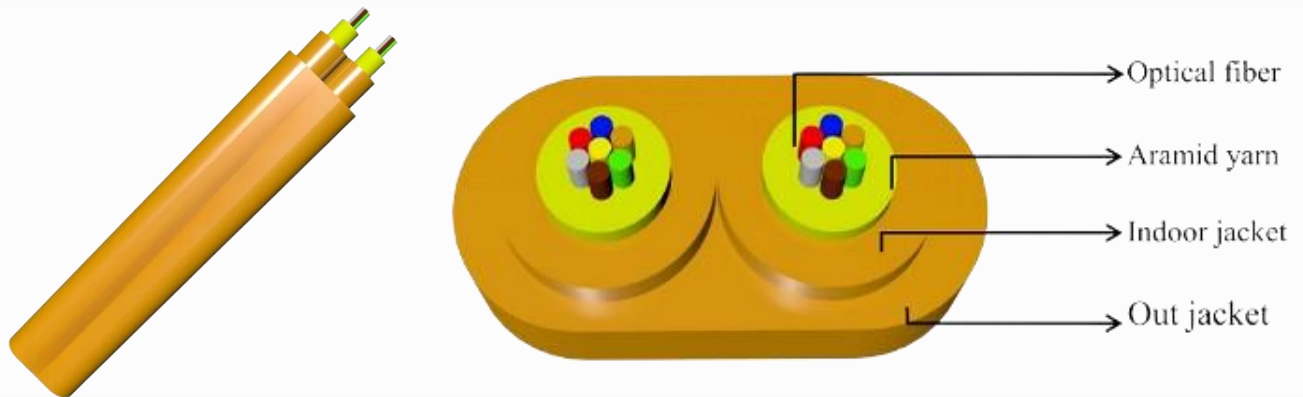

Description

Indoor flat mini optical cable (GJFJBVY) uses two multi-core colored 250 μ M fiber is used as the optical transmission medium and wrapped with aramid yarn as a reinforcement. Extrude PVC or LSZH inner sheath on each fiber, and then extrude flat PVC or LSZH outer sheath. Other sheath materials can be provided according to requirements.

Applications

- For indoor horizontal cabling
- As pigtailed movable connectors and patch cords for communication equipment
- Use Data Center

Characteristics

- Using colored optical fibers, high integration
- Aramid reinforced components provide excellent tensile performance for optical cables
- Multiple cores with small outer diameter
- Aramid reinforced fiber with high strength, good bending performance, no fiber paste, convenient for construction and connection

Fan-out Optical Fiber Cable

MODEL : IK-FOC-GJFJBVY-XX



Technical Parameters

Cable Type	Cable Diameter	Cable Weight	Tensile Strength Long/Short term	Crush Resistance Long/Short term	Bending Radius Dynamic/Static	Storage Temperature
	(mm)	(kg/km)	(N)	(N)	(mm)	(°C)
GJFJBVY-24C	4.2X7.6	31	200/400	300/1000	20D/10D	- 20°C ~+60°C

Note:

Transport/storage temperature: -20°C ~ +60°C

Standard length: 2000m; other lengths are also available.

Fiber type: G652D, G657A1, G657A2, 50/125, 62.5/125, OM3, OM4, OM5

Ordering information

MODEL: IK-FOC-GJFJBVY-XX

- FOC: Fiber Optic Cable
- GJFJBVY: Cable Type
- XX: 24C