


Fiber Optics Cables - 8 fiber - Multimode - OM4 - 50/125 - Outdoor (Armor) - Steel Corrugated Tape armouring with PE outer jacket.

MODEL : GYXTW08M4P

Description & Construction



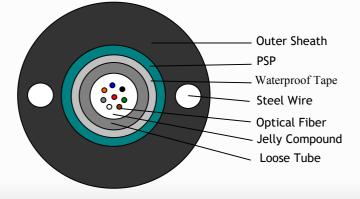

- Single jelly compound filled loose tube containing up to 24 fibers
- Waterproof tape between the steel tape and loose tube with jelly compound
- Double-sided PE corrugated steel tape armored
- Parallel double steel wire as strength member
- Compact structure, light weight, steel tape armored excellent crush-resistant performance
- Excellent water-proof layer, good moisture resistance

Applications

- Suitable for ducts and aerial
- Long distance communication system
- Local area network system
- Subscriber network system





Fiber Optics Cables - 8 fiber - Multimode - OM4 - 50/125 -Outdoor (Armor) - Steel Corrugated Tape armouring with PE outer jacket.

MODEL : GYXTW08M4P

Physical & Environmental Characteristics

 Operation temperature 	−40 °C~60 °C		
 Jacket Material 	PE		
Fiber Count	8		
 Outside Diameter(mm) 	8.0±0.3mm		
 L.T. Diameter(mm) 	2.1		
 Cable Weight (kg/km) 	70.0		

Specifications

Tensile Load	S(N)	1500
	L(N)	600
Crush Load	S(N)	1000
	L(N)	300
Bend Radius	S(mm)	20D
	L(mm)	10D

Fiber color code

BL- Blue	GR- Green	GY-Grey	RE- Red
OR- Orange	BR- Brown	WH- White	Bl- Black

Ordering Information:

Model: GYXTW08M4P

- GY: outdoor cable; X: central tube; T: jelly compound; W: streel wire.
- 08 denotes fiber count
- M4 denotes OM4
- P denotes PE sheath

