


Fiber Optics patch cords - SC-LC - MM - OM3 - Duplex

MODEL: IK-FPC-SC-LC-MM-M3-DX-X

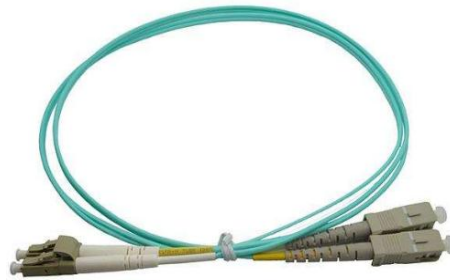

LC-SC Duplex MM OM3

Features

- Compliant with: ANSI, Bellcore, TIA/EIA, IEC Standards
- Low Insertion Loss and High Return Loss
- Excellent Repeatability and Changeability
- Simplex and Duplex Available
- With Ceramic Ferrules
- PVC & LSZH cable option
- Optical performance 100% factory tested

Applications

- Telecommunication Networks
- CATV Networks
- Active Device Termination
- Local Area Networks
- Data processing networking

Fiber Optics patch cords - SC-LC - MM - OM3 - Duplex

MODEL: IK-FPC-SC-LC-MM-M3-DX-X

Characteristics	Conditions	Values
▶ Insertion Loss Return	Against Reference Connector	<0.3dB
▶ Loss(MM)	PC	>35dB
▶ Durability	1000times	<0.1dB
▶ Impact	1.5mm drop, 8 times	<0.2dB
▶ Operating temperature	-40 °C + 80 °C	
▶ Cable outer diameter	3.0mm	

Ordering Information:

Model: IK-FPC-SC-LC-MM-M3-DX-20

- FPC: Fiber Optic Patch Cord
- SC-LC: Connector Type
- MM: Multimode 50/125um
- M3: OM3
- DX: Duplex
- 20: 20 meter length