


Fiber Optic Distribution box -16 fiber - 16 x SC Simplex Adapters with 16 x PLC Splitters.

MODEL: FODB-16F-SC-SX

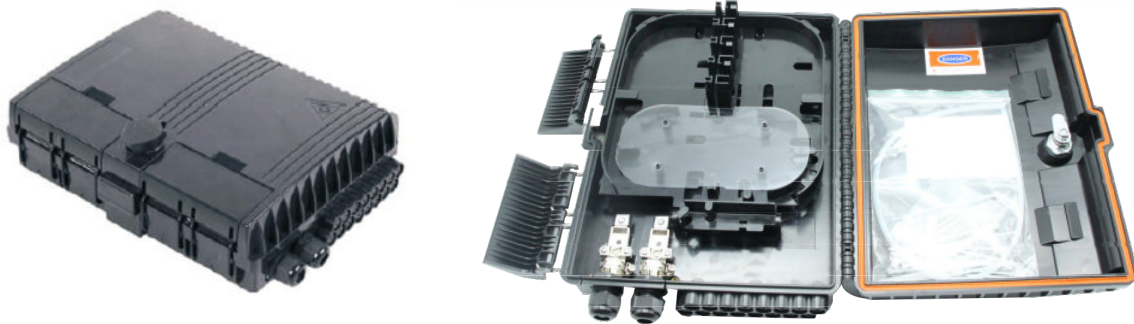

Description

- Water-proof design with IP-65 Protection level.
- Integrated with splice cassette and cable management rods. Manage fibers in a reasonable fiber radius condition.
- Easy to maintain and extend the capacity.
- Fiber bend radius control more than 40mm.
- Suitable for the fusion splice or mechanical splice.
- 1x2/1x4/1x8/1x16 Splitter Can be installed as an option.
- Efficient cable management.
- Entrance cable OD:7-10mm.
- Distribution cable of 16 ports for 2-4mm drop cable. Wall Mount and Pole mount Install.

Standard Accessories

- Installation nuts, Splice sleeves, Metal key

Configuration

Material	Size	Max Capacity		Numbers of Adapter	Weight	Color
PC+ABS	L*W*H(mm) 303x236x109	Splice 16/32 Fibers	PLC Splitter 1pcs of 1x16(SC)	16 pcs SC/UPC or SC/APC	1.5kgs	Black

Ordering Information:

Model: FODB-16F-SC-DX

- FODB: Fiber Optic Distribution Box
- SC denotes Fiber Adapter Type
- 16F denotes 16Fiber
- DX denotes Duplex