


Outdoor Drop Cable

MODEL : IK-FOC-GJYXCH-XX

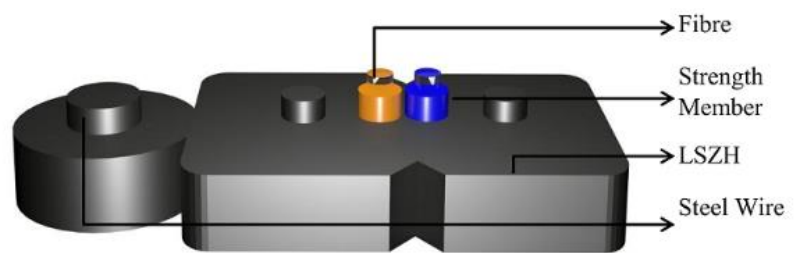

Description

The optical fiber unit is positioned in the centre ,two parallel fiber reinforced plastics FRP are placed at the two sides ,A steel wire as the additional strength member is also applied ,then the cable is completed with a black or color LSZH Sheath

Applications

- Used for fiber optic access networks FTTH

Characteristics

- Special low bending sensitivity fiber provides high bandwidth
- Two parallel FRP strength members ensure good performance of crush resistance to protect the fiber
- Simple structure light weight and high practicability
- Low smoke zero halogen and flame retardant sheath
- Single steel wire or stranded wire with additional strengthening elements to ensure good tensile performance of the optical cable

Outdoor Drop Cable

MODEL : IK-FOC-GJYXCH-XX



Technical Parameters

Cable Type	Cable Diameter	Cable Weight	Tensile Strength Long/Short term	Crush Resistance Long/Short term	Bending Radius Dynamic/Static	Storage Temperature
	(mm)	(kg/km)	(N)	(N)	(mm)	(°C)
GJYXCH-1C	2.0X5.0	20	300/600	1000/2000	30D/15D	- 20°C ~ +60°C
GJYXCH-2C	2.0X5.0	20	300/600	1000/2000	30D/15D	- 20°C ~ +60°C

Note:

Transport/storage temperature: -20°C ~ +60°C

Standard length: 2000m; other lengths are also available.

Fiber type: 0657A1, 0657A2, 0657B3

Ordering information

MODEL: IK-FOC- GJYXCH -XX

- FOC: Fiber Optic Cable
- GJYXCH: Cable Type
- XX: 1C/ 2C