


Fiber Optic Distribution Box - Splice 12/24 Fibers - Wall Mount and Pole Mount Install - 250x189x72mm

MODEL : IK-FDB-B3-12/24F-XX

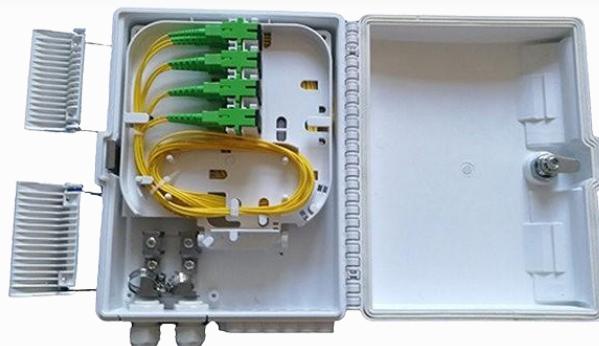

Features

- Water-proof design with IP-65 Protection level
- Integrated with splice cassette and cable management rods
- Manage fibers in a reasonable fiber radius condition
- Easy to maintain and extend the capacity
- Fiber bend radius control more than 40mm
- Efficient cable management
- Entrance cable OD:7-10mm
- Suitable for the fusion splice or mechanical splice
- 1x2/1x4/1x8 Splitter can be installed as an option
- Wall mount and Pole mount install
- Distribution cable of 12 ports for 2-4mm drop cable

Standard Accessories

- Installation nuts, Splice sleeves, Metal key

Configuration

| Material | Size | Max Capacity | | Numbers of Adapter | Weight | Color |
|----------|--------------------------|---------------------|---------------------------------|----------------------------|--------|------------|
| PC+ABS | L*W*H (mm) 250*189*72 | Splice 12/24 Fibers | PLC Splitter 1pcs of 1*8(SC) | 12 pcs SC/UPC or SC/APC | 1.2kgs | Light Grey |

❖ Note: XX= DX/SX