


Cat 6 Patch panel - UTP - 24 port, with rear cable management

MODEL: PPM-24KR6M

Description & Construction

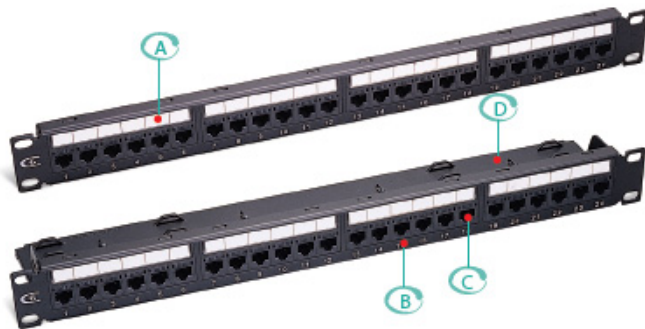

- A** Write on description label protected by clear plastic holder
- B** Port identification numbers
- C** RJ45 Modular Jacks are FCC part 68 compliant. Contacts are 50µ" hard gold plating
- D** Optional rear cable management bar

Patch panel loaded with Category 6 keystone jack is designed for superior performance that meets or exceeds industry standard Category 6 ANSI/TIA 568-C.2 and ISO/IEC 11801 2nd edition.



Features

- 24 pieces Cat 6 UTP keystone jacks pre-loaded.
- Contacts are phosphor bronze plated with 50 micro inches hard gold.
- 110/ KRONE universal IDC connector provides vertical termination for 23-26 AWG solid wires.
- Dual T568A & T568B wiring.
- Complies with FCC Part 68.
- Polycarbonate, 94V0 rated.
- UL , cUL and DELTA EC listed.

Ordering Information

Part #	Description
PPM-24KR6M	Cat 6 Patch panel - UTP - 24 port, with rear cable management IDC, Unshielded, 90 degree, .D. versi

REV.			DESCRIPTION		DATE	APPROVED
A						
B						

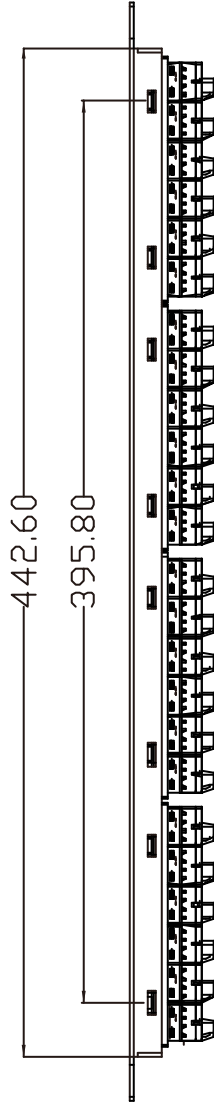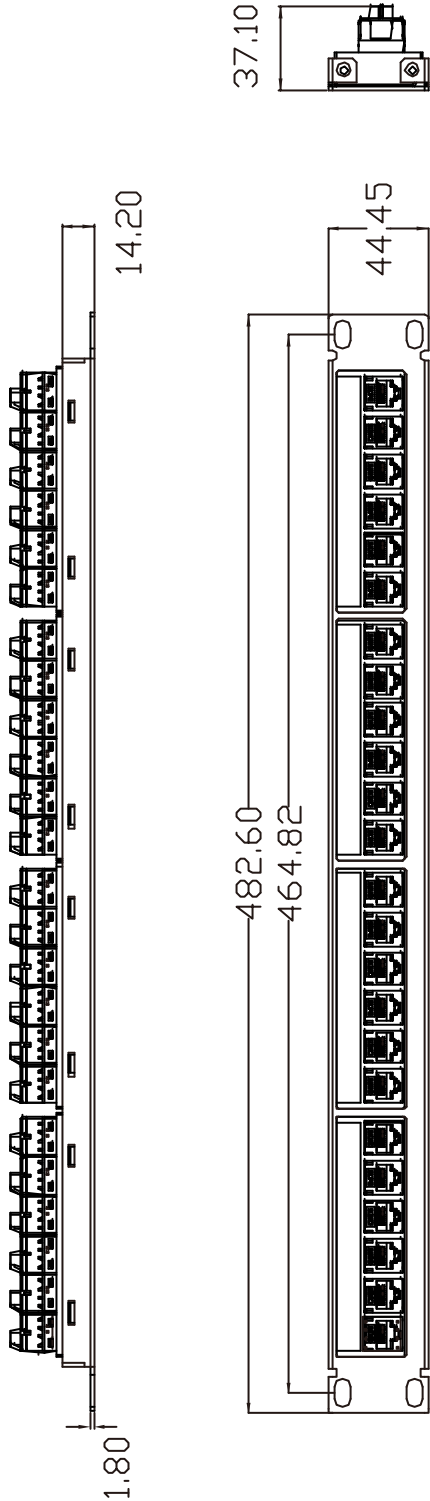

SPECIFICATION	
1 Current Rating	1.5Amps
2 Dielectrical Withstanding Voltage	1000V
3 Insulation Resistance	Min.500 MΩ
4 Contact Resistance (After Environmental Test)	Max. 35 mΩ
5 Material	PC+ABS UL94V0
6 RJ45 Jack Contact	Phosphor bronze, 50u" Gold Plating
7 Compliance	FCC Part 68

ANGLE	TOLERANCE	MODEL		PPM-24KR6M		DRAW NAME		Specification Chart		REV.	A
		301-500	±0.60	121-300	±0.50	DRAWER	MATERIAL	PART NO.	UNIT	SCALE	1:1
81-120	±0.40	DATE		2006.09.04	TREATMENT	DRAWING NO.		DRAWING NO.		MM	
31-80	±0.30	CHECK		DESIGNER	APPROVED	DRAWING NO.		DRAWING NO.		A4	
11-30	±0.20	TOLERANCE		1-10	±0.10	DRAWING NO.		DRAWING NO.			