


Mini Breakout Optical Cable

MODEL : IK-FOC-GJFJVY-XX

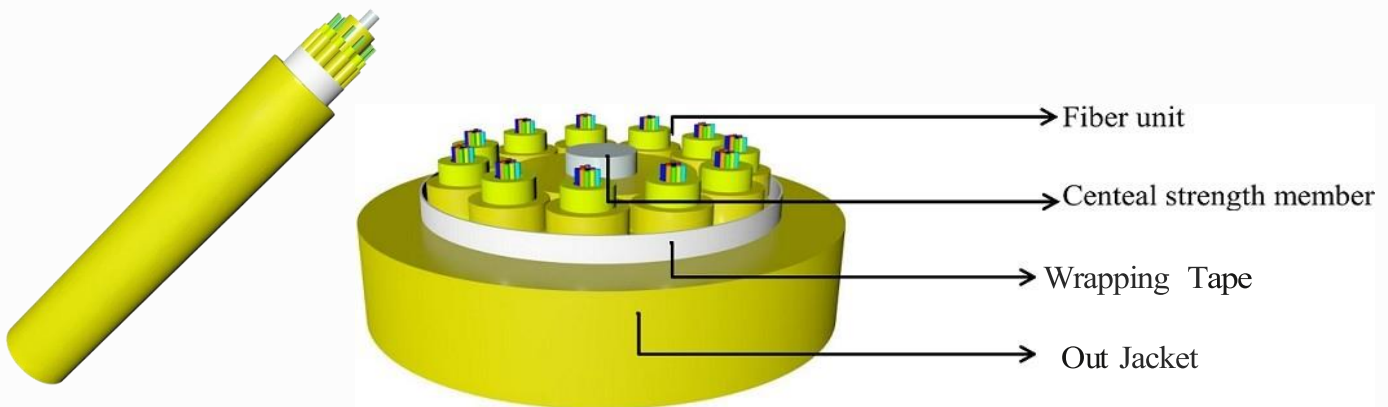

Description

Indoor multi-core mini optical cable (GJFJVY) using multi-core subunits ($\varnothing$ 250 μ m colored optical fiber, aramid reinforced element), non-metallic center reinforced core, optical cable subunit layer twisted at the center reinforced core to form the cable core, with a layer of polyvinyl chloride (PVC) or low smoke halogen-free material (LSZH, low smoke, halogen-free, flame retardant) sheath extruded from the outermost.

Applications

- For indoor horizontal and vertical cabling
- As pigtails movable connectors and patch cords for communication equipment

Characteristics

- Using colored optical fibers, high integration
- Aramid reinforced components provide excellent tensile performance for optical cables
- Multiple cores with small outer diameter
- Aramid reinforced fiber with high strength, good bending performance, no fiber paste, convenient for

Mini Breakout Optical Cable

MODEL : IK-FOC-GJFJVY-XX



Technical Parameters

Cable Type	Cable Diameter	Cable Weight	Tensile Strength Long/Short term	Crush Resistance Long/Short term	Bending Radius Dynamic/Static	Storage Temperature
	(mm)	(kg/km)	(N)	(N)	(mm)	(°C)
GJFJVY-24C	9.0±0.5	72	200/600	300/1000	20D/10D	- 20°C ~ +60
GJFJVY-48C	9.0±0.5	79	200/600	300/1000	20D/10D	- 20°C ~ +60
GJFJVY-72C	11.2±0.5	126	200/600	300/1000	20D/10D	- 20°C ~ +60
GJFJVY-96C	13.5±0.5	178	200/600	300/1000	20D/10D	- 20°C ~ +60
GJFJVY-	15.5±0.5	250	200/600	300/1000	20D/10D	- 20°C ~ +60

Note:

Transport/storage temperature: -20°C ~ +60°C

Standard length: 2000m; other lengths are also available.

Fiber type: G652D, G657A1, G657A2, 50/125, 62.5/125, OM3, OM4, OMS

Ordering information

MODEL: IK-FOC-GJFJVY-XX

- FOC: Fiber Optic Cable
- GJFJVY: Cable Type
- XX: 24C/48C/72C/96C