


# Micro Extractable Optic Cable

MODEL : IK-FOC-GJPFXJH-XX

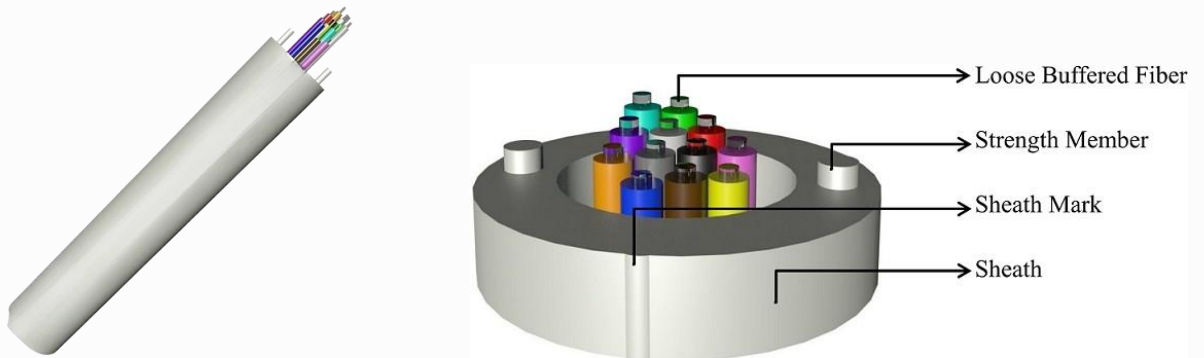

## Description

Several 900  $\mu\text{m}$  tight buffered fibres are housed in the LSZH sheath with a special cross section. Two FRPs are placed in parallel as the strength member. An external mark of the sheath indicates the direction of opening.

## Applications

- Indoor Building for Vertical Wiring
- Especially applicable to pre-connection

## Characteristics

- All-dry design, easy for branching and splicing
- Small size and light weight, easy for installation
- LSZH sheath ensuring good flame-retardant performance
- Accurate process control ensuring good mechanical and temperature performances

# Micro Extractable Optic Cable

MODEL : IK-FOC-GJPFJXH-XX



## Technical Parameters

| Cable Type  | Cable Diameter | Cable Weight | Tensile Strength<br>Long/Short term | Crush Resistance<br>Long/Short term | Bending Radius<br>Dynamic/Static | Storage Temperature |
|-------------|----------------|--------------|-------------------------------------|-------------------------------------|----------------------------------|---------------------|
|             | (mm)           | (kg/km)      | (N)                                 | (N)                                 | (mm)                             | (°C)                |
| GJPFJXH-6C  | 6.5±0.2        | 36           | 200/600                             | 300/1000                            | 20D/10D                          | - 20°C ~ +60°C      |
| GJPFJXH-8C  | 8.5±0.2        | 40           | 200/600                             | 300/1000                            | 20D/10D                          | - 20°C ~ +60°C      |
| GJPFJXH-12C | 8.5±0.2        | 55           | 200/600                             | 300/1000                            | 20D/10D                          | - 20°C ~ +60°C      |
| GJPFJXH-24C | 10.5±0.2       | 125          | 200/600                             | 300/1000                            | 20D/10D                          | - 20°C ~ +60°C      |

### Note:

Transport/storage temperature: -20°C ~ +60°C

Standard length: 2000m; other lengths are also available.

Fiber type: G652D, G657A1, G657A2, 50/125, 62.5/125, OM3, OM4, OMS

## Ordering information

MODEL: IK-FOC-GJPFJXH-XX

- FOC: Fiber Optic Cable
- GJBFJXH: Cable Type
- XX: 24C/48C/72C/96C/144C