
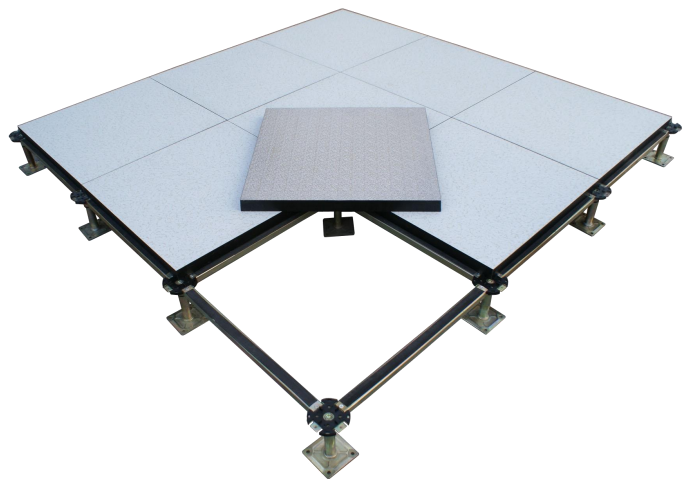


- Cement Infilled Steel Raised Access Floor System(Finished Type)
- Cement Infilled Steel Raised Access Floor System(Bare Type)
- Steel Encased Calcium Sulphate Raised Access Floor System
- Steel Encased Wood Core Raised Access Floor System
- Calcium Sulphate Raised Access Floor System
- Wood Core Raised Access Floor System
- Aluminum Raised Access Floor System
- Air-Flow Raised Access Floor System
- Magnetic Carpet

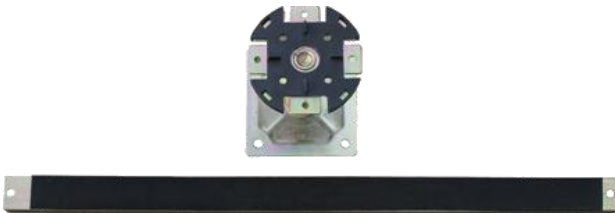

600mm Wood Core Raised Access Floor

- Environment friendly wood core board.prevent static validly; fireproof, class B2; anti-skid,soundproof, dust proof,anti-soil.
- Adjustable height for pedestal,assembly agility,large wire,good exchangeability
- Anti-static,high dimensional precision, light weight but strong loading ability and shockproof, fireproof.
- Outlet mating. Elegant appearance for paving wildly brand top tiles.

Specification

Size:	600×600×38mm
Covering:	Bare
Bottom:	Galvanized steel
Panel material:	Wood Core

Performance

Type :	FS1000
Concentrated N/Kg :	4450/453
Impact load/N :	670
Ultimate load/N :	13350
Uniform load N/m ² :	23000
Rolling load/N 10 times:	4450
Rolling load/N 10000 times:	3560
Reaction to Fire :	Bf1-S1
Acoustic insulation:	EN ISO 10848-2

Accessories

Pedestal :	Round Head Pedestal FFH=300mm Tube Diameter:M25 Tube Thickness: 1.2mm Top size:M90*3mm Bottom size:95*95*2mm Solid rod:M18
Stringer:	Steel Stringer Size:20*30*535mm
Screw :	M6×16 All Accessories are anti-rust.

